

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

PLEASE USE  
AMENDED SHEET(S)(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
23 October 2003 (23.10.2003)

PCT

(10) International Publication Number  
WO 03/088473 A1

(51) International Patent Classification:

H03B 5/12

(21) International Application Number: PCT/NL02/00221

(22) International Filing Date: 5 April 2002 (05.04.2002)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): TELEFONAKTIEBOLAGET L. M. ERICSSON (SE/SE),  
Telefonvagen 30, SE-126 25 Stockholm (SE).

(72) Inventor: and


(75) Inventor/Applicant (for US only): VAN ZEIJL, Paulus,  
Thomas, Maria (NL/NL); Dasstraat 52, NL-7559 AD  
Hengelo (NL).(74) Agent: PRINS, A., W., c/o Vereenigde, Nieuwe Parklaan  
97, 2587 BN The Hague (NL).(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VN, YU, ZA, ZM, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette

(54) Title: OSCILLATOR CIRCUIT AND OSCILLATOR BIASING METHOD

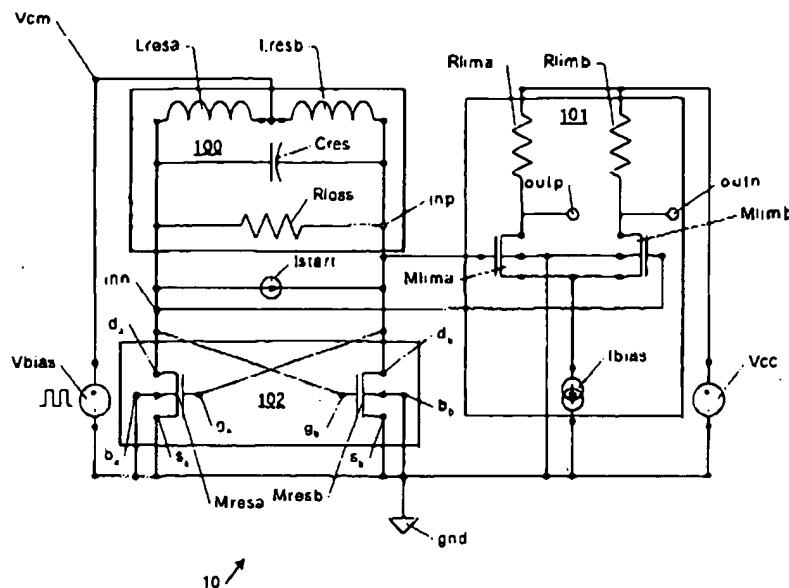

(57) Abstract: An oscillator circuit (1) with an oscillator device (100). The oscillator device has an oscillator bias contact (Vcm). A bias source (Vbias) is connected to said oscillator contact with a source contact. The voltage source includes a varying bias source which in use provides a bias varying in time. The bias source may for example be a switched DC source which in use provides an output signal varying between a first level and a second level.

WO 03/088473 A1